


## ZW350e Ultra-compact high brightness laser projector





- Bright WXGA laser projector 4000 lumens and IP6X certified
- Designed with the environment in mind -DuraCore laser technology cuts power consumption and ensures a long product lifespan
- Ultra compact for easy installation 1.1x zoom, 360-degree and portrait projection
- Excellent image quality Perfect for meeting rooms, medium-sized exhibition venues, events or tradeshows

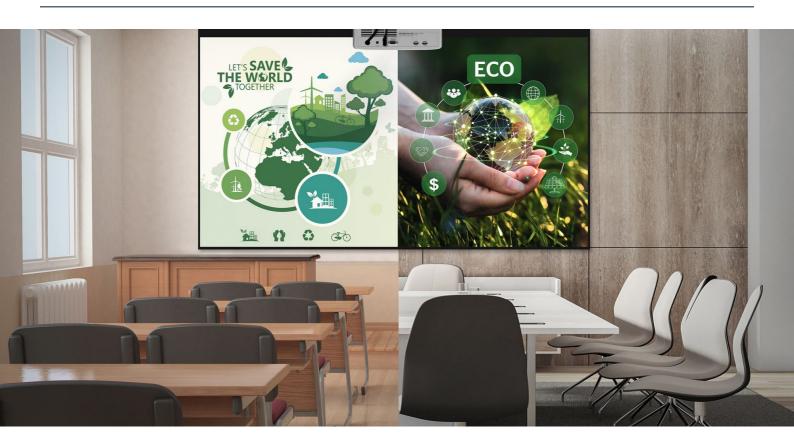

The ZW350e is Optoma's most compact, hassle free WXGA DuraCore laser projector to date. This 4000-lumen projector is built for maintenance-free continuous operation up to 30,000 hours, while its small and lightweight footprint makes it 34% smaller than any other projector in the Optoma range, offering flexible installation in virtually any orientation and location.

## **Specifications**

| EAN: | 5055387 | 666382, | Colour: | White |
|------|---------|---------|---------|-------|
|      |         |         |         |       |

| EAN: 5055387666382, Colour: White   |   |  |
|---|---|--|
| Display/image   |   |  |
| Display technology  | DLPTM   |  |
| Resolution  | WXGA (1280x800)   |  |
| Brightness  | 4,000 lumens  |  |
| Contrast ratio  | 300,000:1   |  |
| Native aspect ratio   | 16:10   |  |
| Aspect ratio - compatible   | 4:3,16:9  |  |
| Keystone correction - vertical  | +/-40°  |  |
| Has vertical auto keystone  | Yes   |  |
| correction  |   |  |
| Displayable colours (millions)  | 1073.4  |  |
| Horizontal scan rate  | 15 ~ 140Khz   |  |
| /ertical scan rate  | 24 ~ 120Hz  |  |
| Jniformity  | 75%   |  |
| Screen size   | 0.51m ~ 7.62m (20" ~ 300") diagonal   |  |
| Lamp info   |   |  |
| _ight source type   | Laser   |  |
| ASER life   | 30,000 hours  |  |
| Optical   |   |  |
| Fhrow ratio   | 1.54:1 ~ 1.72:1   |  |
| Projection distance (m)   | 1m - 10m  |  |
| Zoom  | 1.1   |  |
| Zoom type   | Manual  |  |
| Focal length (mm)   | 21.85 ~ 24.00   |  |
| Vative offset   | 112%  |  |
| Connectivity  |   |  |
| Connections   | Innute 2 v HDML1 4o 2D support  |  |
|   | Inputs 2 x HDMI 1.4a 3D support   |  |
|   | Outputs 1 x Audio 3.5mm, 1 x USB-A power 1.5A   |  |
|   | Control 1 x RS232   |  |
| General   |   |  |
| voise level (typical)   | 31dB  |  |
| voise level (max)   | 34dB  |  |
| PC compatibility  | FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac  |  |
| 2D compatibility  | NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz                                 |  |
|   | SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,                                       |  |
|   | 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)   |  |
| 3D  | Full 3D   |  |
| Security  | Security bar, Kensington Lock, Password protected interface                           |  |
| P rating  | IP6X  |  |
| OSD / display languages   | 25 languages: Arabic, Czech, Danish, Dutch, English, Farsi,                           |  |
|   | Finnish, French, German, Greek, Hungarian, Indonesian, Italian,                       |  |
|   | Japanese, Norwegian, Polish, Portuguese, Romanian, Russian,                           |  |
|   | Chinese (simplified), Spanish, Swedish, Chinese (traditional),<br>Turkish, Vietnamese |  |
| 24/7 operation  | Yes   |  |
| 360° operation  | Yes   |  |
| Operating conditions  | 0°C ~ 40°C, Max. Humidity 80%, Max. Altitude 3000m                                    |  |
| Remote control  | Card style  |  |
| Speaker count   | 1   |  |
|   | 15W   |  |
| Natts per speaker   |   |  |
| n the box   | AC power cord<br>Remote control   |  |
|   | 2x AAA batteries  |  |
|   | Basic user manual   |  |
| Optional wireless models  | UHDCast Pro   |  |
| Power   |   |  |
| Power supply  | 100V ~ 240V, 50-60Hz  |  |
| Power consumption (standby)   | <0.5W   |  |
| Power consumption (min)   | 88W   |  |
|   | 139W  |  |
|   |   |  |
| Power consumption (max)   | 10000   |  |
| Power consumption (max)<br>Weight and dimensions  |   |  |
| Power consumption (max)<br>Weight and dimensions<br>Dimensions (W x D x H) mm                               | 274 x 216 x 114   |  |
| Power consumption (max)<br>Weight and dimensions<br>Dimensions (W x D x H) mm<br>Gross weight<br>Net weight |   |  |







Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 05012023023939